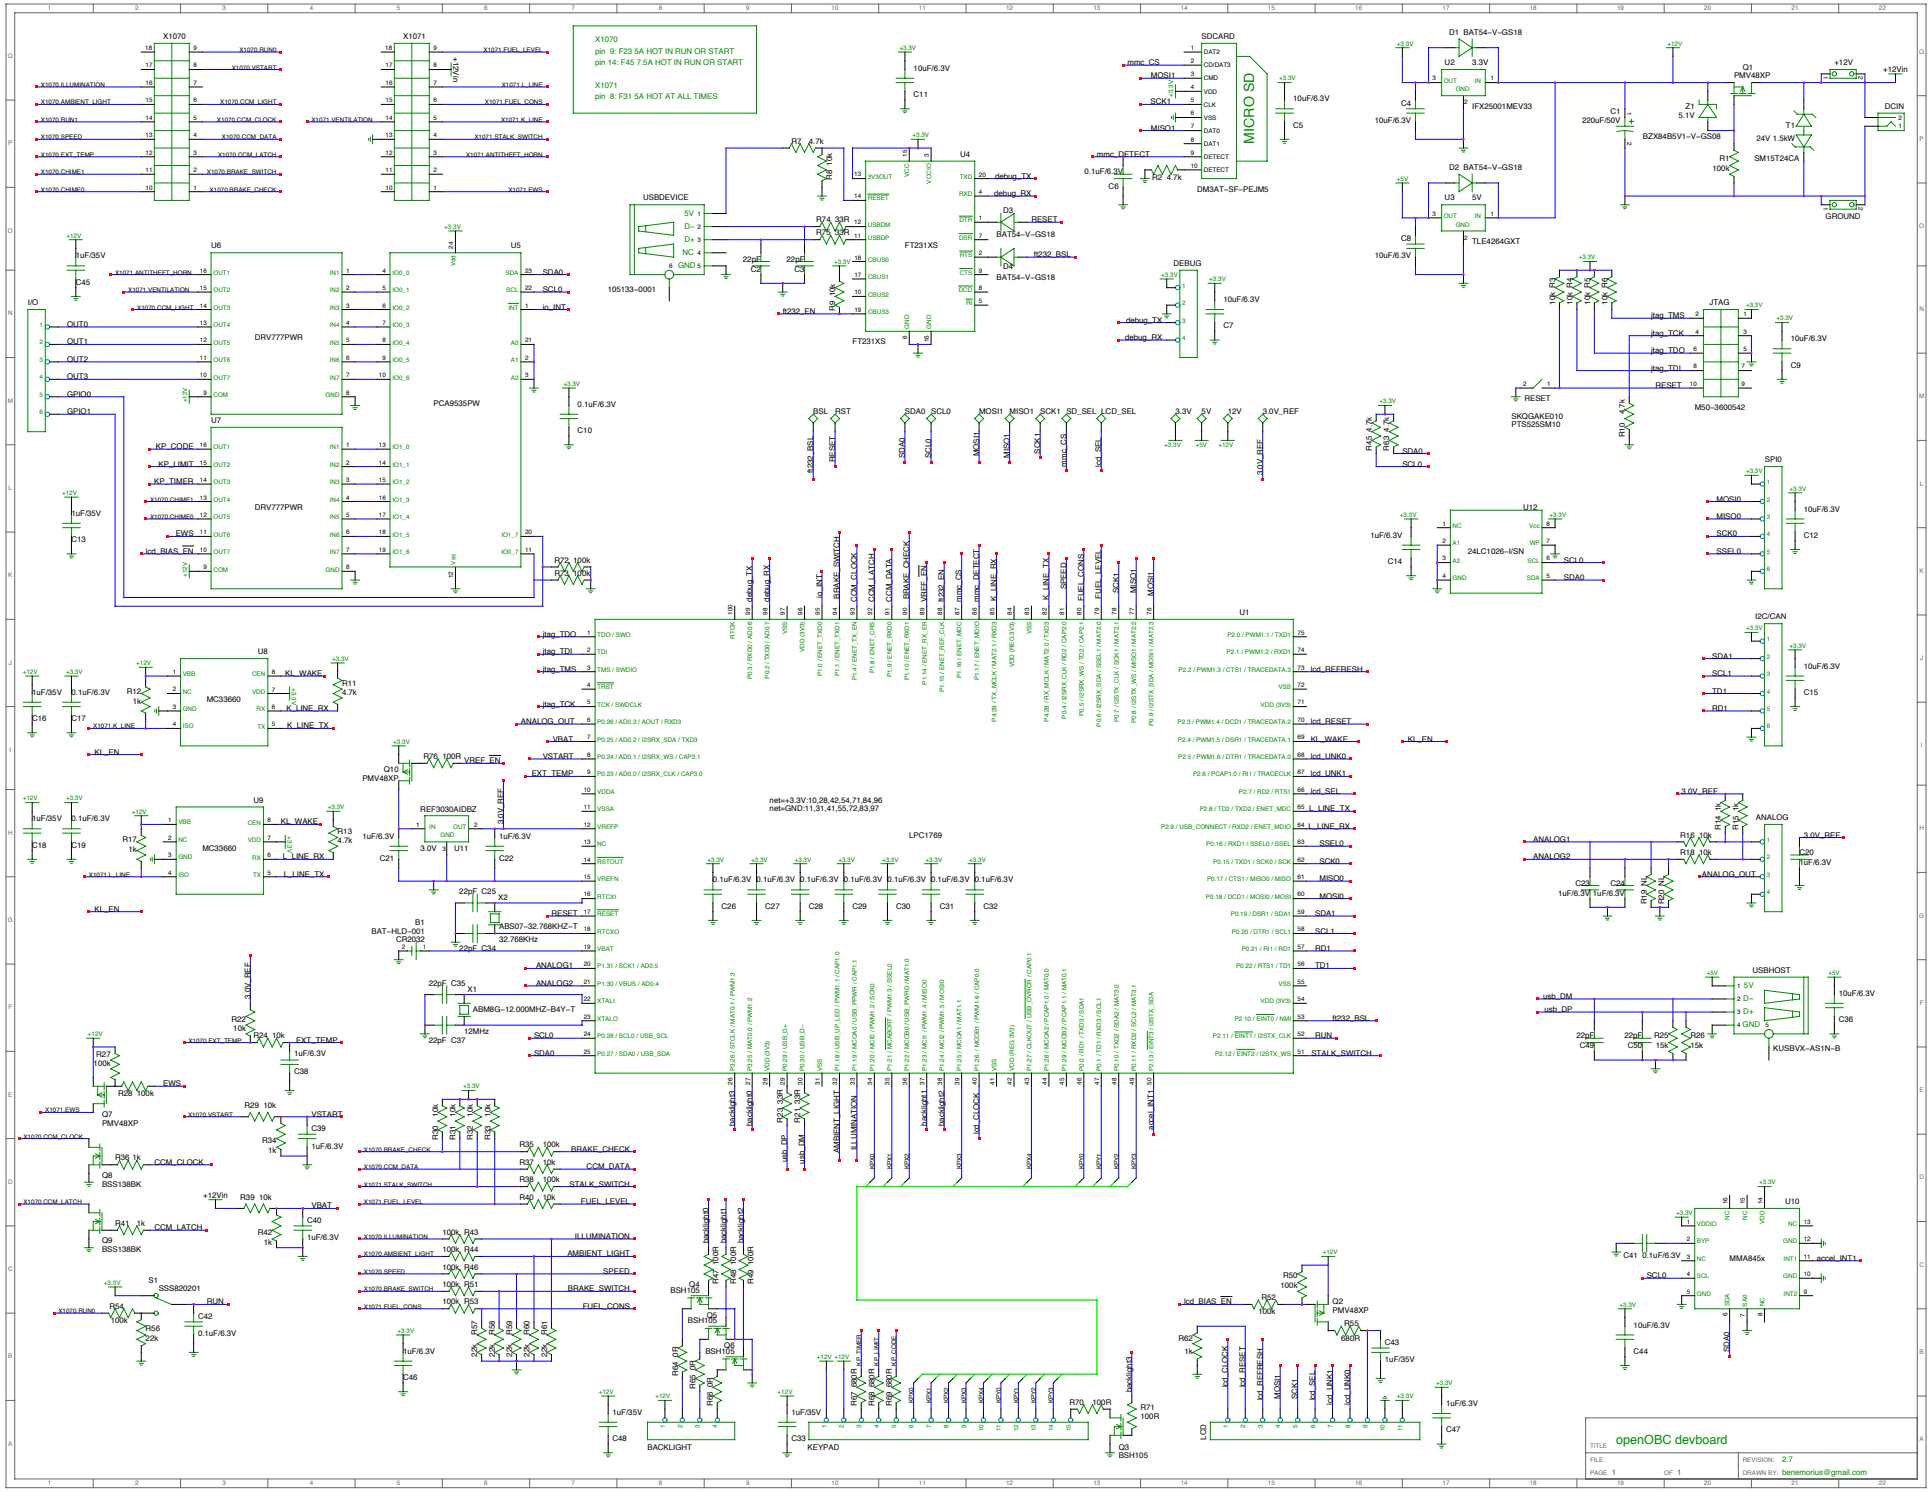
X1070
pin 9: F23 5A HOT IN RUN OR START
pin 14: F45 7.5A HOT IN RUN OR START
X1071
pin 8: F31 5A HOT AT ALL TIMES
X1070
X1071
I/O
DRV777PWR
PCA9535PW
USBDEVICE
105133-0001
FT231XS
SDCARD
MICRO SD
DM3AT-SF-PEJM5
DEBUG
JTAG
M50-3600542
SKQGAKE010
PTS525SM10
SPI0
I2C/CAN
MC33660
REF3030AIDBZ
LPC1769
ANALOG
USBHOST
KUSBVX-AS1N-B
MMA845x
BACKLIGHT
KEYPAD
LCD
TITLE
openOBC devboard
FILE:
REVISION: 2.7
PAGE 1 OF 1
DRAWN BY: benemorius@gmail.com